

Prosafe

WE FOCUS ON YOUR SAFETY

PROFESSIONAL LIGHTING



AIRSTAR



SAFETY LIGHTING BATTERY OPERATED

Propack 300

Standard:


IEC-60598-1, CE, IP54

Descriptions:

- Battery operated for portable use.
- 22,000 lumen.
- 360° uniform lighting.
- High-performance LED technology.
- Compact and lightweight design.
- Weather-resistant construction.
- Easy and quick setup.

*Available for rental or sale

AIRSTAR

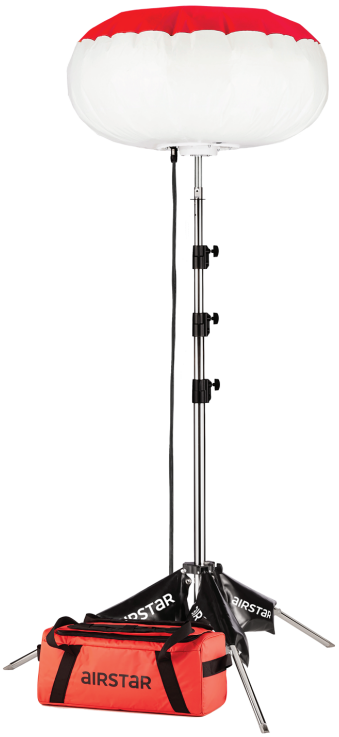

SAFETY LIGHTING

Sirocco 300 (22,000 lumen)
Sirocco 500 (44,000 lumen)
Sirocco 700 (66,000 lumen)
Sirocco 1000 (99,000 lumen)
Sirocco 1300 (132,000 lumen)

Standard:

IEC-60598-1, CE, IP54

Descriptions:

- 360° uniform lighting.
- High-intensity illumination.
- Durable and weather-resistant design.
- Stable and adjustable stand.
- Easy and quick deployment.
- Suitable for various worksites.

*Available for rental or sale

AIRSTAR



EVENT LIGHTING SPHERE

Crystal RGBW (66,000 lumen)

Standard:

IEC-60598-1, CE, IP54

Descriptions:

- Lighting: RGBW (Red, Green, Blue, White) LED lights.
- Design: Sleek, modern sphere shape.
- Color customization: Full spectrum of color changes.
- Durability: Weather-resistant and durable.
- Power source: Battery-operated.
- Size: Available in various sizes.
- Control: Remotely controlled or programmed for effects.
- Light effect: Soft ambient lighting or vibrant color effects.

*Available for rental or sale

AIRSTAR



EVENT LIGHTING TUBE

Neo Pixel RGBW

Standard:

IEC-60598-1, CE

Descriptions:

- Lighting: RGBW (Red, Green, Blue, White) LED lights
- Design: Cylindrical tube shape
- Color Customization: Full spectrum of color changes
- Durability: Weather-resistant and durable
- Power Source: Battery-operated
- Size: Available in various sizes
- Control: Remotely controlled or programmed for effects
- Light Effect: Soft ambient lighting or vibrant color effects

*Available for rental or sale

Prosafe
WE FOCUS ON YOUR SAFETY

AIRSTAR

22,000 LUMEN | 2.8 kg 5.9 lb LIGHTWEIGHT | 5,000 K DAYLIGHT COLOR | 8 hrs


Sirocco 300
ProPack





Lighting data

Light Engine	Airstar LED Matrix : 4 x 5 500 lm
Maximum lumen	22,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	345 lx - 32 fc

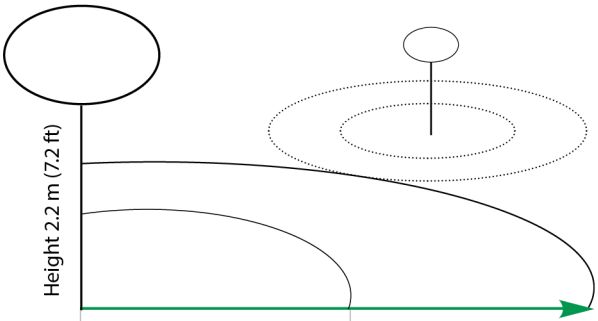

Light	5 lx	0.5 lx
Radius	8 m - 26 ft	18 m - 59 ft
Surface	201 m² 2,163 ft²	1,017 m² 10,946 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0,5 lx) ***

Technical data

Wind resistance of the balloon			80 km/h - 50 mph
Power consumption			160 W
Efficiency			138 lm/W 8,148 lm/kg - 3,728 lm/lb
Available voltage			52 V battery
Mode	Full	Efficient	Eco
Battery lifetime	4 h	6.5 h	12 h
Recommended battery			1,7 kWh / 52 V
Certifications			IEC-60598-1, CE, IP54
Flame-retardant fabric			

Weight and dimensions

Net weight of the balloon	2.8 kg - 5.9 lb
Envelope size	ø 60 cm / h 37 cm ø 23 in / h 15 in
Telescopic column	Up to 2,20 m (7.2 ft) Weight 1.6 kg (3.5 lb)

Packaging

Included in the transport case:
Full set lighting balloon with 1x standard envelope with telescopic column, 1x 52V battery, 1x battery charger, 1x quick-start guide, 1x envelope repair patch kit

Transport case	67 x 51 x 26 cm (L*w*h) 26 x 20 x 10 in (L*w*h)
Transport gross weight	Less than 23 kg (50 lb)

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109,3 yd

4 light animations available

AIRSTAR LIGHT — Available on the App Store — ANDROID APP ON Google Play

Accessories & Main options

Envelop variants	Lenticular, reversed reflector, personalised with your logo, red top colour modifiable

MADE IN FRANCE — CE — QUALITY CONTROL ALL PRODUCTS — IP54

* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope

Prosafe
WE FOCUS ON YOUR SAFETY

AIRSTAR


22,000 LUMEN | 2.8 kg 5.9 lb LIGHTWEIGHT | 5,000 K DAYLIGHT COLOR | Power Switch

Sirocco 300



Lighting data

Light Engine	Airstar LED Matrix : 4 x 5 500 lm
Maximum lumen	22,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	112 lx - 10.4 fc

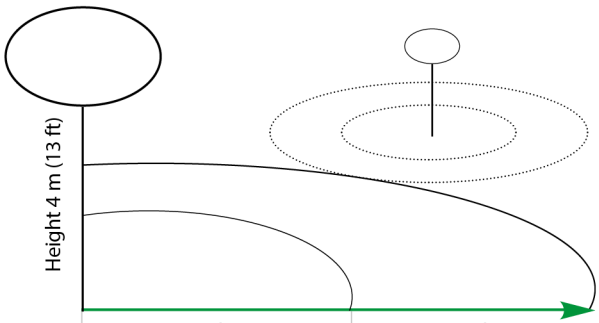

Light	5 lx	0.5 lx
Radius	10 m - 33 ft	21 m - 69 ft
Surface	314 m² 3,380 ft²	1,385 m² 14,908 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0,5 lx) ***

Weight and dimensions

Net weight of the balloon	2.8 kg - 5.9 lb
Envelope size	ø 60 cm / h 37 cm ø 23 in / h 15 in

Technical data

Wind resistance of the balloon	80 km/h - 50 mph
Power consumption	160 W
Efficiency	138 lm/W 8,148 lm/kg - 3,728 lm/lb
Available voltage	100~240 VAC / 50-60 Hz
Recommended battery	1,6 kWh / 52 V
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Packaging

Included in the transport bag:
Full set lighting balloon with 1x standard envelope (without stand), 1x power cord (9.2 m/30 ft), 1x quick-start guide, 1x envelope repair patch kit, 1x battery power cord (optional with PowerSwitch)

Transport bag	47 x 25 x 25 cm (L*w*h) 19 x 10 x 10 in (L*w*h)
Transport gross weight	Less than 7 kg (15.4 lb)

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109,3 yd

4 light animations available

AIRSTAR LIGHT | Available on the App Store | ANDROID APP ON Google Play

Recommanded accessories

Stand 4 m	Heightfrom 126 cm (49 in) to 400 cm (157 in) Weight6.7 kg (15 lb)
Sandbag	Weight (with sand): 12 kg - 26 lb Recommanded purchase x3 per stand

Main options

Power Switch (Battery input 52V &Backup power)
Provides flexibility in use and installation while ensuring safety (continuity in case of power failure) and bolstering security in work environments to avert accidents

Envelop variants: Lenticular, reversed reflector, personalised with your logo, red top colour modifiable

MADE IN FRANCE | CE | QUALITY CONTROL ALL PRODUCTS | IP54

* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope

Prosafe
WE FOCUS ON YOUR SAFETY

airstar


Sirocco 500

44,000 LUMEN | 3.5 kg 7.8 lb LIGHTWEIGHT | 5,000 K DAYLIGHT COLOR | Power Switch



Lighting data

Light Engine	Airstar LED Matrix : 8 x 5 500 lm
Maximum lumen	44,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	263 lx - 24.4 fc

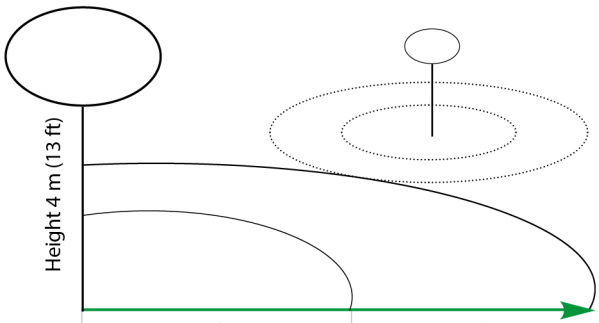

Light	5 lx	0.5 lx
Radius	13 m - 42,6 ft	27 m - 88,5 ft
Surface	531 m² 5,715 ft²	2289 m² 24,638 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0,5 lx) ***

Weight and dimensions

Net weight of the balloon	3.8 kg - 7.8 lb
Envelope size	ø 85 cm / h 50 cm ø 33 in / h 19 in

Packaging

Included in the transport bag:
Full set lighting balloon with 1x standard envelope (without stand), 1x power cord (9 m/29 ft), 1x quick-start guide, 1x envelope repair patch kit, 1x battery power cord (optional with PowerSwitch)

Transport bag	58 x 25 x 25 cm (L*w*h) 22 x 10 x 10 in (L*w*h)
Transport gross weight	Less than 8.5 kg (18.5 lb)

Recommanded accessories

Stand 4 m	Heightfrom 126 cm (49 in) to 400 cm (157 in) Weight6.7 kg (15 lb)
Sandbag	Weight (with sand): 12 kg - 26 lb Recommanded purchase x3 per stand

Main options

Power Switch (Battery input 52V &Backup power)
Provides flexibility in use and installation while ensuring safety (continuity in case of power failure) and bolstering security in work environments to avert accidents

Envelop variants: Lenticular, reversed reflector, personalised with your logo, red top colour modifiable

Technical data

Wind resistance of the balloon	80 km/h - 50 mph
Power consumption	294 W
Efficiency	150 lm/W 12,429 lm/kg - 5,641 lm/lb
Available voltage	100~240 VAC / 50-60 Hz
Recommended battery	1,6 kWh / 52 V
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109,3 yd

4 light animations available

AIRSTAR LIGHT | Available on the App Store | ANDROID APP ON Google Play

MADE IN FRANCE | CE | QUALITY CONTROL ALL PRODUCTS | IP54


* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope

Prosafe
WE FOCUS ON YOUR SAFETY

AIRSTAR


66,000 LUMEN | 6.5 kg 14 lb LIGHTWEIGHT | 5,000 K DAYLIGHT COLOR

Sirocco 700

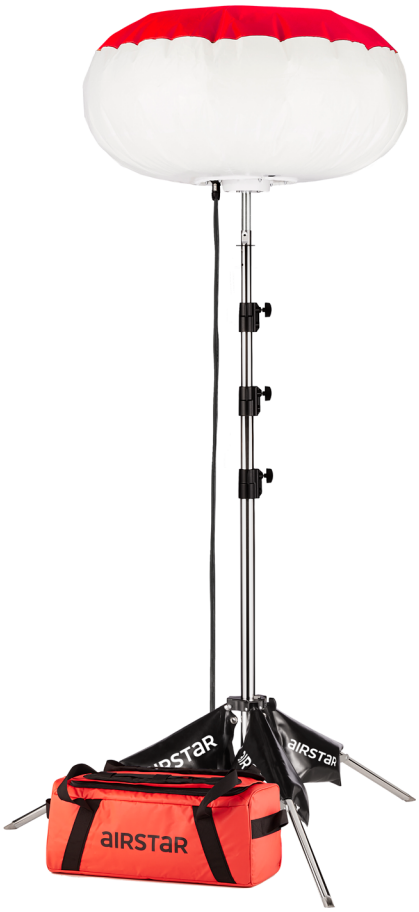

Lighting data

Light Engine	Airstar LED Matrix: 12 x 5 500 lm
Maximum lumen	66,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	452 lx - 41 fc

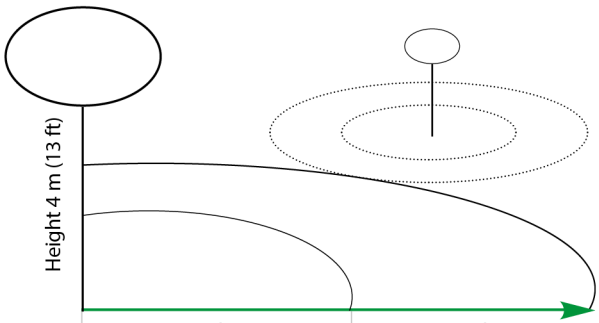

Light	5 lx	0.5 lx
Radius	15 m - 42,2 ft	32 m - 111,5 ft
Surface	707 m² 7,610 ft²	3,216 m² 34,616 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0,5 lx) ***

Weight and dimensions

Net weight of the balloon	6.5 kg - 14 lb
Envelope size	ø 100 cm / h 50 cm ø 39 in / h 19 in

Technical data

Wind resistance of the balloon	100 km/h - 60 mph
Power consumption	500 W
Efficiency	132 lm/W 10,153 lm/kg - 4,605 lm/lb
Available voltage	100~240 VAC / 50-60 Hz
Recommended generator	1 kVA
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Packaging

Included in the transport bag:
Full set lighting balloon with 1x standard envelope (without stand), 1x power cord (9.2 m/30 ft), 1x quick-start guide, 1x envelope repair patch kit

Transport bag	86 x 30 x 30 cm (L*w*h) 33 x 11 x 11 (L*w*h)
Transport gross weight	Less than 13 kg (29 lb)

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109,3 yd

4 light animations available

AIRSTAR LIGHT — Available on the App Store — ANDROID APP ON Google Play

Recommanded accessories

Stand 5 m	Heightfrom 140 cm (55 in) to 460 cm (181 in) Weight13.5 kg (30 lb)
Sandbag	Weight (with sand): 12 kg - 26 lb Recommanded purchase x3 per stand

Main options

Envelop variants	Lenticular, reversed reflector, personalised with your logo, red top colour modifiable

MADE IN FRANCE | CE | QUALITY CONTROL ALL PRODUCTS | IP54


* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope

Prosafe
WE FOCUS ON YOUR SAFETY

AIRSTAR


Sirocco 1000

99,000 LUMEN | 8.6kg 18lb LIGHTWEIGHT | 5,000K DAYLIGHT COLOR

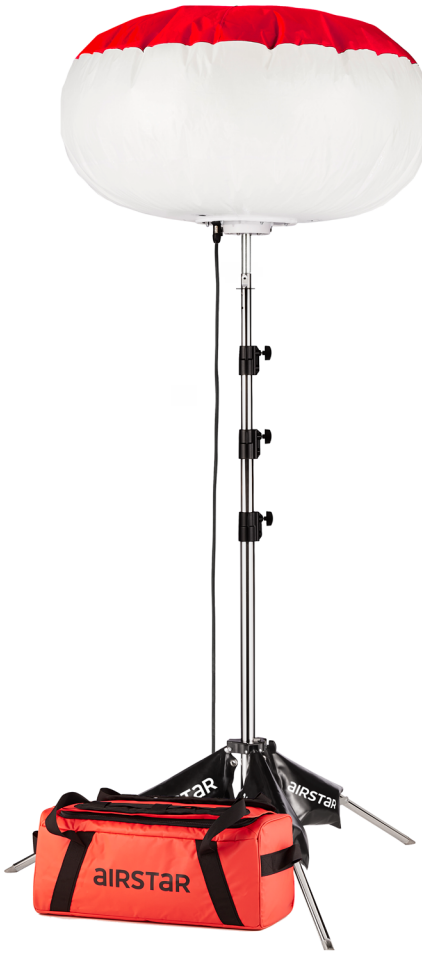

Lighting data

Light Engine	Airstar LED Matrix: 18 x 5 500 lm
Maximum lumen	99,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	660 lx - 61 fc

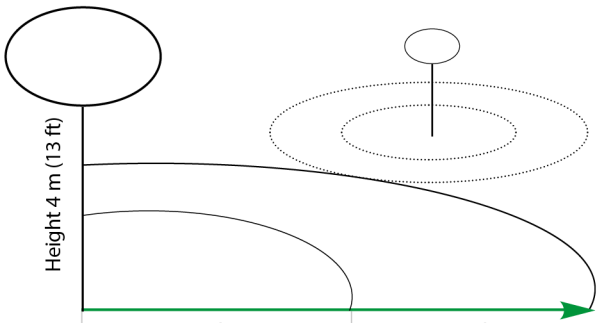

Light	5 lx	0.5 lx
Radius	17 m - 55,77 ft	36 m - 118,1 ft
Surface	907 m² 9,762 ft²	4,069 m² 13,349 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0,5 lx) ***

Weight and dimensions

Net weight of the balloon	8.6 kg - 18 lb
Envelope size	ø 116 cm / h 64 cm ø 45 in / h 25 in

Packaging

Included in the transport bag:
Full set lighting balloon with 1x standard envelope (without stand), 1x power cord (9.2 m/30 ft), 1x quick-start guide, 1x envelope repair patch kit

Transport bag	108 x 30 x 30 cm (L*w*h) 42 x 11 x 11 in (L*w*h)
Transport gross weight	Less than 15.5 kg (34 lb)

Recommanded accessories

Stand 5 m	Heightfrom 140 cm (55 in) to 460 cm (181 in) Weight13.5 kg (30 lb)
Sandbag	Weight (with sand): 12 kg - 26 lb Recommanded purchase x3 per stand

Main options

Envelop variants	Lenticular, Sirflex (for permanent or semi-permanent use), reversed reflector, personalised with your logo, red top colour modifiable

Technical data

Wind resistance of the balloon	100 km/h - 60 mph
Power consumption	700 W
Efficiency	141 lm/W 11,511 lm/kg - 5,221 lm/lb
Available voltage	100~240 VAC / 50-60 Hz
Recommended generator	1,5 kVA
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109,3 yd

4 light animations available

AIRSTAR LIGHT | Available on the App Store | ANDROID APP ON Google Play

MADE IN FRANCE | CE | QUALITY CONTROL ALL PRODUCTS | IP54

* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope

Prosafe
WE FOCUS ON YOUR SAFETY

AIRSTAR


Sirocco 1300

132,000 LUMEN | 9.4 kg 20 lb LIGHTWEIGHT | 5,000 K DAYLIGHT COLOR



Lighting data

Light Engine	Airstar LED Matrix: 24 x 5 500 lm
Maximum lumen	132,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	704 lx - 65 fc

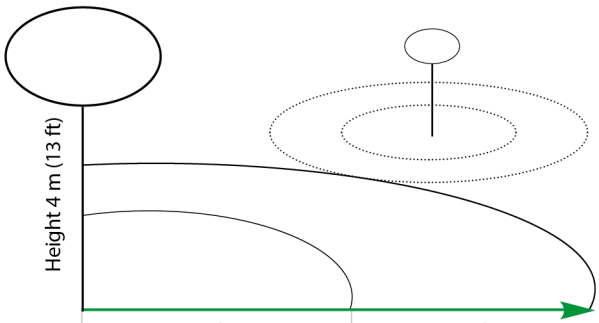

Light	5 lx	0.5 lx
Radius	25 m - 82 ft	45,5 m - 149 ft
Surface	1,963 m² 21,129 ft²	6,500 m² 69,965 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0,5 lx) ***

Weight and dimensions

Net weight of the balloon	9.4 kg - 20 lb
Envelope size	ø 138 cm / h 77 cm ø 54 in / h 30 in

Technical data

Wind resistance of the balloon	100 km/h - 60 mph
Power consumption	920 W
Efficiency	143 lm/W 14,042 lm/kg - 6,373 lm/lb
Available voltage	100~240 VAC / 50-60 Hz
Recommended generator	2 kVA
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Packaging

Included in the transport bag:
Full set lighting balloon with 1x standard envelope (without stand), 1x power cord (9.2 m/30 ft), 1x quick-start guide, 1x envelope repair patch kit

Transport bag	108 x 30 x 30 cm (L*w*h) 42 x 11 x 11 in (L*w*h)
Transport gross weight	Less than 16.5 kg (36 lb)

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109,3 yd

4 light animations available

AIRSTAR LIGHT | Available on the App Store | ANDROID APP ON Google Play

Recommanded accessories

Stand 5 m	Heightfrom 140 cm (55 in) to 460 cm (181 in) Weight13.5 kg (30 lb)
Sandbag	Weight (with sand): 12 kg - 26 lb Recommanded purchase x3 per stand

Main options

Envelop variants	Lenticular, Sirflex (for permanent or semi-permanent use), reversed reflector, personalised with your logo, red top colour modifiable

MADE IN FRANCE | CE | QUALITY CONTROL ALL PRODUCTS | IP54

* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope





Airstar Event Lighting -Neo Pixel RGBW





Neo Pixel RGBW

technical data

	S	M	M
dimensions	ø 14 cm x2.5 m ø 5.5 in x8.2 ft	ø 20 cm x 2.5 m ø 7.8 in x8.2 ft	ø 20 cm x 5 m ø 7.8 in x16.4 ft
net weight	640 g / 1.14 lb	840 g / 1.85 lb	1,6 kg / 3.52 lb
power	32 W	32 W	64 W
supply voltage	100~240 V	100~240 V	100~240 V
light source	RGBW LED	RGBW LED	RGBW LED
number of LED	150	150	300
light controls	> 10 color schemes x 10 animations: let your creativity run wild! > Individual light control using the controller's user interface > Individual or grouped control of the balloons with the Airstar Light app, thanks to Mesh network and Bluetooth >DMX • DMX connectors 5-pin • Wireless DMX optional • Macro Mode: 4 to 28 channels • Neo S & M 2.5 m Pixel Mode: 75 pixels for 302 channels • Neo M 5 m Pixel Mode: 100 pixels for 402 channels		
set-up	3 min for each Neo		
inflation	Air-inflated, airtsealed and without ventilation. Pressure: 350 mlb / 5 psi		
cable length	5 m / 16.4 ft wire(between the controller and the power supply)		
packaging	transport bag (L 50 x l 30 x h 40 cm / L 19.6 x w 11.8 x h 15.7 in) optional		

Available in 3 sizes
S: ø 14 cm x 2,5 m
M: ø 20 cm x 2,5 m
M: ø 20 cm x 5 m

S: ø 5.5 in x8.2 ft
M: ø 7.8 in x8.2 ft
M: ø 7.8 in x16.4 ft



Only 1 controller
for all models



Transport bag:
carry multiple units





With Airstar Light app:
Choose your color schemes
and your animations
Control up to 250 balloons

AIRSTAR Prosafe
WE FOCUS ON YOUR SAFETY

MADE IN FRANCE · CE · QUALITY CONTROL OF ALL THE PRODUCTS · IP54

+230 260 2400
info@prosafe.mu
prosafe.mu
4, Bissoondoyal Street,
Port Louis, Mauritius

Prosafe

WE FOCUS ON YOUR SAFETY

AIRSTAR



+230 260 2400

info@prosafe.mu

prosafe.mu

4, Bissoondoyal Street,
Port Louis, Mauritius



Crystal Pixel Dynamic White












Crystal Pixel Dynamic White

Technical data

Lighted area	2,000 m² / 22,000 ft²
Color temperature	Dynamic white: from 3,000 to 6,500 K
CRI	80
Flicker	3.1 kHz
Luminous flux	2 x 33,000 lm
LED lifetime	50,000 h
Power consumption	500 W
Power supply	100-240 VAC 50-60 Hz
Battery input - 52V / Backup power	**PowerSwitch** (optional) **New!** Provides flexibility in use and installation, while ensuring safety (continuity in case of power failure) and the serenity of your events.

Envelope diameter	130 cm (4 ft), 160 cm (5 ft), 200 cm (6.5 ft)
Wind resistance	Up to 80 km/h (49 mph)
Set-up time	5 minutes
Inflation	Fast and self-regulated inflation
Noise level	3 modes: silent, standard, high wind
Net weight of the balloon with envelope	From 11 kg (24 lb) to 12 kg (27 lb)
Certifications	CE, IP 54
Light source	Airstar LED Matrix : 12 macro-pixels
Mesh network balloons	100 m (109 yd) between each balloon
Light controls	> via the **control panel on the product** > Remotely via the **Airstar Light app** > **DMX** • DMX profils available for major control surfaces • 5-pin DMX connectors • Wireless DMX (optional) • Macro mode: 4 to 16 channels • Pixel mode: 6 pixels/2 colors for 14 channels

Illumination

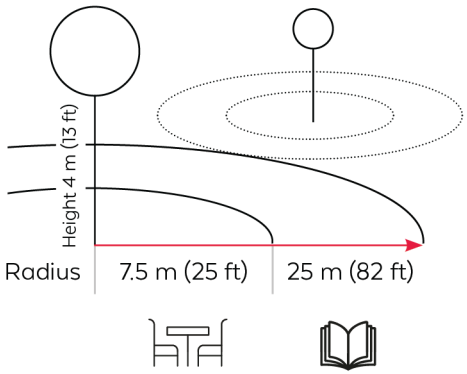

Packaging

Shock-proof wheeled case
Dimensions : 81 x 47 x 35 cm
31 x 18 x 13 in
Total weight: less than 23 kg (50 lb)



Accessories


Various stands
Stand cover, black or white
Sandbags
Suspension kit
Guying kit

Customisation

Vinyl graphics
Coloured slipcovers
Digitally printed envelopes

Airstar Light App

Control your balloons easily and remotely!

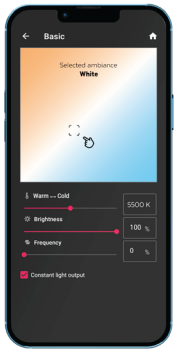

Control up to 250 balloons

7 light animations available

AIRSTAR LIGHT
Available on the App Store
ANDROID APP ON Google Play

crystal RGBW










packaging

Shock-proof trolley box
81 x 47 x 35 cm



accessories

> Stand
> Spandex base cover
> 2 batteries for autonomous use:
- 1 colour (red, green or blue): 20 h
- white: 8 h
- all colours + white: 4 h

customization

> Vinyl graphics
> Colored slipcovers
> Digitally printed envelopes
> Other envelope shapes :
Diamond, Egg, Star, Can, Heart, Rugby

technical data

Lamps	6 x white LED (WW), 6 x colour LED (RVB)
Luminous flux	WW LED: 21 000 Lm RGB LED: 4 300 Lm
Lamps lifetime	> 50 000 h
Power for each module	WW LED: 23 W - RGB LED: 20 W
Total power	300 W - 1.4 A
Total power for a generator	0.5 kVA
Power supply	100-240 VAC 50/60 HZ
Restrike time	instant
Noise level	49 dB
Colour temperature	from warm white to cold white
DMX control	yes
Flicker free	yes
Envelope sizes	130 cm, 160 cm, 200 cm
Standard envelope shape	sphere
Weight of the balloon	9 kg
Weight of the control box	3.9 kg
Wind resistance	Up to 70 km/h
Safety	IP 54
Quick set-up	< 15 minutes

AIRSTAR

Prosafe
WE FOCUS ON YOUR SAFETY

MADE IN FRANCE

CE

QUALITY CONTROL OF ALL THE PRODUCTS

LIGHTING
Inventor and world leader of the lighting balloon, Airstar lights up all your events

+230 260 2400
info@prosafe.mu
prosafe.mu
4, Bissoondoyal Street,
Port Louis, Mauritius

Copyright Airstar | Photo credit : Airstar | 2020

crystal RGBW



why should you have the crystal RGBW ?

Airstar innovation. Airstar is the first one to offer a white and coloured (RGB) LED lighting balloon, DMX controlled.

All-in-one LED lighting balloon: **lighting and decor.** The Crystal RGBW answers all needs when it comes to event lighting. Very versatile, it can light up a space (thanks to white LED) as well as it can decor this same space (thanks to RGB LED). It is also 100% customizable (logos, themed envelopes...).

Tailor-made light show
The DMX control box of the Crystal RGBW offers an infinite lighting customization. Indeed it has 40 pre-set colour modes and 4 do it yourself modes which are 100% customizable. The Crystal RGBW also has an autonomous mode working with a timer, which enables to pre-set the light show before the event. All modes can be controlled through a remote (scope: 50 m).

markets

Social events
Cocktails, parties, diners

Fashion
fashion shows, photoshoots

Festivals
concerts, arts, culture

Sports
Championships tournaments, races

Hospitality
Hotels, bars, restaurants

Business
Seminars, trade fairs

Branding
Showroom, street marketing, product launch

main features

> Air-inflated lighting balloon (built-in fan)

> Pole mounted or hanged from ceiling or truss

> Indoor and outdoor use

> White LED (WW) and coloured LED (RGB)

AIRSTAR

Prosafe
WE FOCUS ON YOUR SAFETY

+230 260 2400
info@prosafe.mu
prosafe.mu
4, Bissoondoyal Street,
Port Louis, Mauritius



main strengths

> All-in-one
Lighting balloon with white LED and coloured LED (RGB)

> Tailor-made light show
Infinite lighting customization thanks to the control box and its many options

> DMX control box
40 pre-set modes, 4 customizable modes, timer...

> Flicker free and quiet
Can be used on broadcasted events


> Remote control
A remote can manage the control box (scope: 50 m)

> Packaging
Light and strong black trolley box

> LED technology
Low consumption and longer lifetime (> 50 000 h)

> Customization
Branding and signal thanks to printed covers, slipcovers and and vinyl graphics



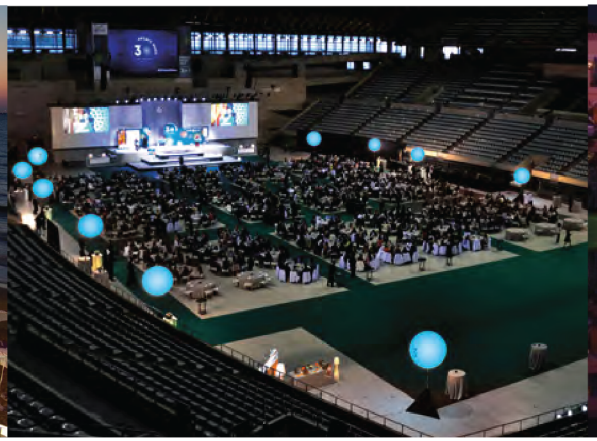



> All-in-one: from a white lighting to a coloured lighting in one wink, thanks to the control box, the DMX mode, or the remote.

+230 260 2400
info@prosafe.mu
prosafe.mu
4, Bissoondoyal Street,
Port Louis, Mauritius

Prosafe
WE FOCUS ON YOUR SAFETY

AIRSTAR



Prosafe Mauritius

4, Bissoondoyal Street, Port Louis,
Mauritius

info@prosafe.mu

+230 260 2400

Prosafe
WE FOCUS ON YOUR SAFETY



Prosafe Mozambique

Avenida Das Industrias, no. 2455 Loja
nº 4, Machava-Matola

info@prosafe.co.mz

+258 85 222 2026

Prosafe
WE FOCUS ON YOUR SAFETY



Prosafe Madagascar

Module 2, Karim Abad II Antanandava
- Betainomby, Toamasina, Madagascar

prosafe@orange.mg

+261 32 05 012 00

Prosafe
WE FOCUS ON YOUR SAFETY



Nardal Safety Tanzania

P.O. Box 105246
Auditax House, 1st Floor
Cocacola Rd, Plot No. 47, Mikocheni
Dar Es Salaam, Tanzania

info@nardalsafety.co.tz

+255 766 904 668

Nardal Safety
Nyenzo na Huduma

prosafe.mu